

Ranger DX600R S5 SURFACE DRILLS

Technical specification

Ranger DX600R is a hydraulic, self-propelled, self-contained, crawler based surface drilling rig with full radio control.

Typical applications for Ranger DX600R are road cutting, pipe-line drilling and foundation drilling, as well as production drilling in medium size quarries. Therefore Ranger DX600R is most often used by construction contractors, mines and quarries, and also included in the equipment fleet of rental houses as well.

KEY FEATURES

Hole diameter:	64- 102 mm (2½"- 4")
Rock tools:	38, 45 or 51 mm (1½", 1¾" and 2")
Rock Drill	17,5kW
Engine output:	168 kW (TIER 4F/EU Stage V)
Flushing air:	6,2 m3/min, up to 10 bar
Production capacity:	2200 m3/8h
Total weight :	15 600 kg





HYDRAULIC ROCK DRILL

Rock drill	HL 650
Rock tools	38,45,51 mm
Operating pressure	100-170 bar
Percussion rate	55 Hz
Percussion output power	17.5 kW
Maximum rotation torque	1 325
Shank lubrication	Air / oil mist
Flushing	Air
Weight	245 kg

FEED

Feed type	CF 145H
Total length	7 700 mm
Rock drill travel	4 320 mm
Max. length of starter rod	4 875 mm (16')
Hose reel	Standard
Feed extension travel	1350 mm
Feed/pull out force	20 kN
Feed swing	-56°/+52° (-20°/+94°)
Feed tilt	125°

ROD CHANGER

Rod changer type	RH 714
Storage capacity	6+1 rods
Rod length	3050, 3660, 4265 mm (10', 12', 14')
Max. hole depth	26,8 m (6x12'+1x16')

BOOM

Boom type	DB 800H, articulated
Boom reach	4,8 m
Drilling coverage	17.6 m ² (26.4 m ²)
Collaring height	+2.5 m/-4.5 m
Horizontal holes	To the right

POWERPACK

Engine type	Caterpillar C 7.1 (TIER 4F/EU Stage V)
DEF tank	AdBlue, 24 l
Max. tilt angles	+/- 45°
Number of cylinders	6
Engine output	168 kW / 1 800 rpm
Transmission type	Gear box
Screw compressor type	Enduro 12
Air filters	2 pcs., with ejector and safety element
Fuel tank	380 l

HYDRAULIC SYSTEM

Number of gear pumps	4 pcs. for dust collector and cooling
Number of piston pumps	2 pcs. for drilling, tramming, boom and rodhandling
Filtration rate	12 micron abs., return 25 micron, pressure
Cooling capacity	up to +50°C ambient
Hydraulic oil tank	200 l
Shank lubrication device	SLU 14-1

CONTROL SYSTEM

Control system type	Hydraulic pilot control and relay logic
Tramming/boom/ drilling control	Pilot/direct/ pilot controlled
User interface	Radio remote and pressure gauges
Drilling control system type	Rock Pilot+
Antijamming system	For rotation standard and flushing optional
Collaring control	Stepless
Voltage	24 VDC

DUST COLLECTOR

Dust collector type	DC 810H
Capacity/vacuum	23 m ³ /min at 1 000 mm vacuum H ₂ O
Filter elements/material	13 pcs/fiber
Total filter surface	10.4 m ²
Primary cyclone	Standard
Movable suction head	Standard

CARRIER

Track type	FL 6
Grouser plate width	310 mm
Ground contact length	2 590 mm
Ground pressure	0.81 kg/cm ²
Ground clearance	440 mm
Turnable superstructure	120° / 180°
Oscillation angles	+/- 10°
Tramming force	121 Kn
Max. tramming speed	3.5 km/h



STANDARD COMPONENTS

1 pc	Rock drill HL 650 T, hydraulic
1 pc	Chain feed CF 145H with movable drill steel support
1 pc	Rod handler RH 714 incl. 1 set of jaws
1 pc	Boom DB 800 H, articulated
1 pc	Carrier track mounted, turnable superstructure
Guides for grousers	
1 pc	Power pack diesel driven, hydraulic pumps and on-board compressor with twin pressure control
1 pc	Control system Rock Pilot+, full radio remote
1 pc	Dust collection system DC 810 H, hydraulic, Primary separator
9 pcs	Working lights
1 pc	Gauge set for accumulator pressure checking
1 pc	Alarm signal
1 pc	Operator's manual (paper copy)
1 pc	Alarm beacon
1 pc	Hose reel
1 pc	Service light, hand held 12V magnetic
EU-safety devices, EN16228	

THE JAWS FOR DRILL STEELS




DRILL STEEL TYPE	DRILL STEEL DIAMETER	RECOMMENDED HOLE DIAMETER
Extension rods	38 mm	64 - 70 mm
	1 1/2"	2 1/2" - 2 3/4"
MF-rods	38 mm	64 - 70 mm
	1 1/2"	2 1/2" - 2 3/4"
Extension rods	45 mm	76 - 89 mm
	1 3/4"	3" - 3 1/2"
MF-rods	45 mm	76 - 89 mm
	1 3/4"	3" - 3 1/2"
MF-rods	51 mm	89 - 102 mm
	2"	3 1/2" - 4"
Extension rods	51 mm	89 - 102 mm
	2"	3 1/2" - 4"

SELECTION OF OPTIONS

Driller's Notes - MWD Data Collection for TIM3D
Driller's Office planning software (one-year license)
Knowledge Box for TIM3D or readiness (4G/LTE and WiFi for My Sandvik)
Knowledge Box for TIM5300-6700 (4G/LTE for My Sandvik, no WiFi)
+ My Sandvik Insight, 1-yr license, BG01722724
+ My Sandvik Wireless Drill Plan Transfer 1-yr license, BG01765055 (Productivity)
TIM 5200 for vertical holes
TIM 5300 for vertical holes and depth measuring
TIM 6300 inclined holes, depth measuring and GPS aiming
TIM 6300 with open interface
TIM 6500 inclined holes, depth measuring, laser level and GPS aiming
TIM 6700 (TIM6500 with open interface)
TIM3D drill navigation system (Leica)
Horizontal drilling kit
EN 16228 Safety cage for feed, long
Feed 5 485 mm (18'), without hose reel and horizontal drilling
Thread greasing
Thread greasing with 5 gallon bucket
Power extractor
Readiness for Power Extractor
Ramp up option RD520 drifter, not with silencer option
Anti- freeze system for air lines
Biodegradable hydraulic oil, not with CSL
Central lubrication system Sandvik
Central lubrication system Lincoln
Electric fuel filling pump
Fast fill connection for fuel Wiggins
Hydraulic rear ground support
Hydraulic winch
Remote Screen Interface for TIMi and TIM3D
Led lights, 6 pcs
Three bar grouser plates
Towing hook
Turnable superstructure 180 deg.
Fuel powered heater for engine
Fuel powered heater for engine and water tank
Readiness for fuel powered heater
Dustmizer, water injection option included (engine heater option needed below freezing point)
Flushing control automatics
Sampling device
Shut down of suction for water holes
Water injection system
Grinder, Dynaset
CME mini junior Grinder




Coverage area and dimensions

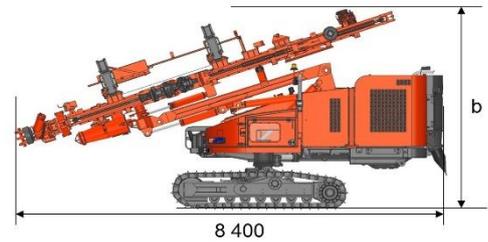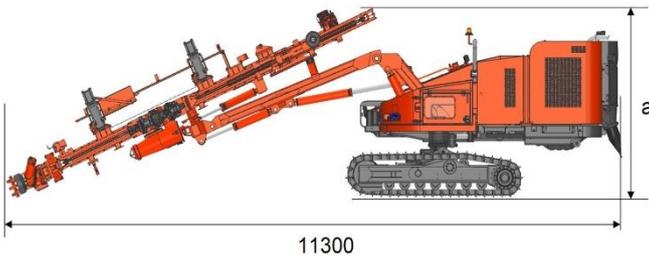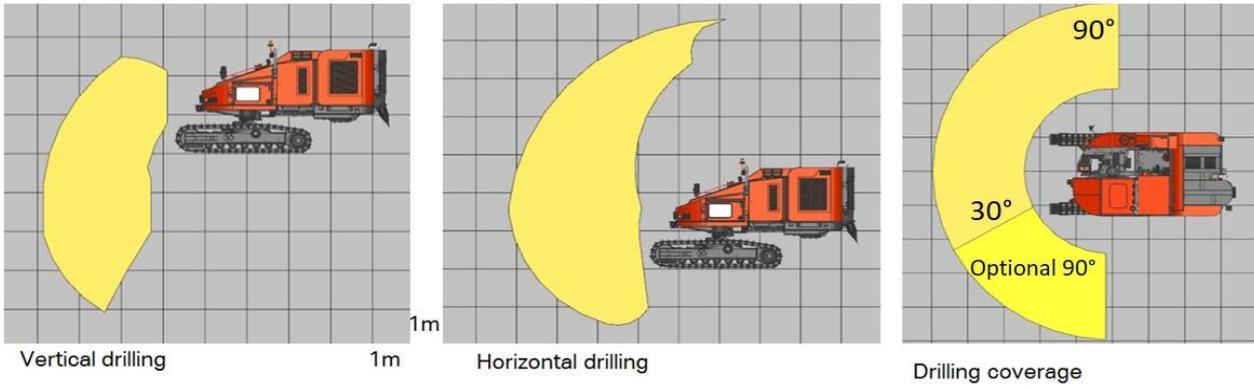

DIMENSIONS

Weight	15 600 kg
Width	2.45 m
Height	a/b, 3.2 m/3.6 m
With safety cage	3.3 m/3.8 m
With noise silencer	3.3 m/4.0 m
Total length	11.3 m/8.4 m



Sandvik Mining and Rock Solutions reserves the right to make changes to the information on this data sheet without prior notification to users. Please contact a Sandvik representative for clarification on specifications and options.